




STANLEY
MAGIC-DOOR
MAGIC-ACCESS
POWER - CLOSE
313150




COMPONENT DESCRIPTION


The Power-Close module enables the motor to assist the spring as the door approaches the closed position. This could be needed in windy or high stack pressure conditions. The module mounts on the electronic control board.



UNPLUG OPERATOR
MOTOR HARNESS

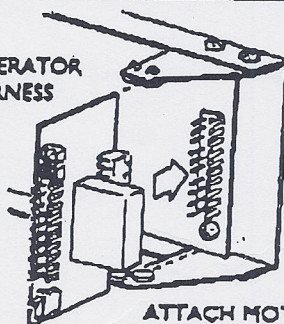

ATTACH MOTOR HARNESS

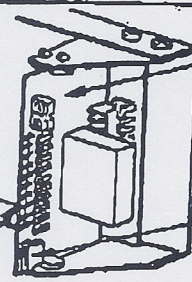


POWER CLOSE
ACCESSORY BOARD

POWER CLOSE /
HOLD SWITCH

(MAGIC-TOUCH MUST BE TURNED
OFF WHEN POWER CLOSE IS IN USE.)

1. Turn all power off.
2. Unplug the operator (motor) harness from the circuit board.
3. Install the two support brackets in holes provided and use screws supplied to secure.
4. Snap the four guides into the brackets.
5. Insert the accessory board into the connector on the circuit board.
6. Plug the operator (motor) harness into the accessory board.
7. Be sure Magic-Touch is in the OFF position on the main board.
8. Turn the power close switch, on the accessory board, to the ON position.
9. Turn power on and operate the door.
10. See below for tune-in of pot adjustments.

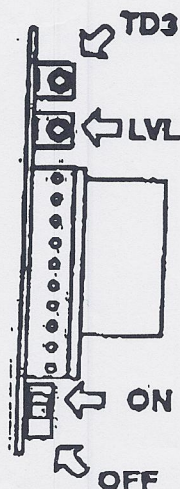

The TD3 pot is the Power Close Start Timer which sets the time (1.5 to 15 seconds) from when the door starts to close to when the additional closing force will be applied.


The LVL pot sets the level of that additional closing force.

STANLEY ACCESS PERMIT TO ENTER 866-867-5560

STANLEY MAGIC-DOOR MAGIC-ACCESS


POWER-CLOSE

13150

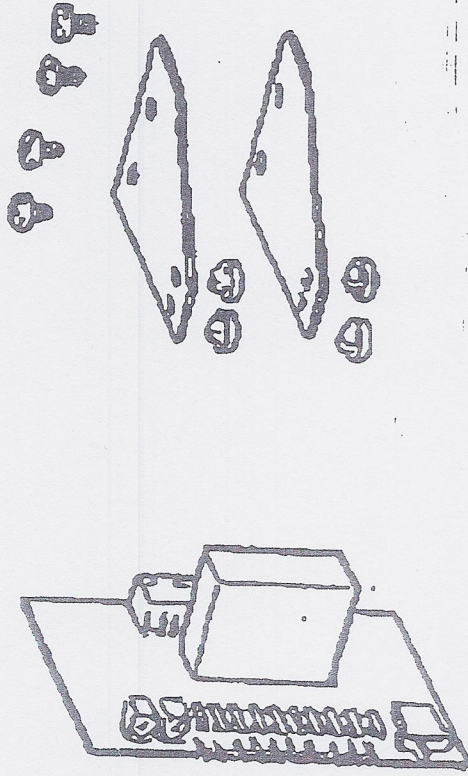

COMPONENT DESCRIPTION

The Power-Close module enables the motor to assist the spring as the door approaches the closed position. This could be needed in windy or high stack pressure conditions. The module mounts on the electronic control board.

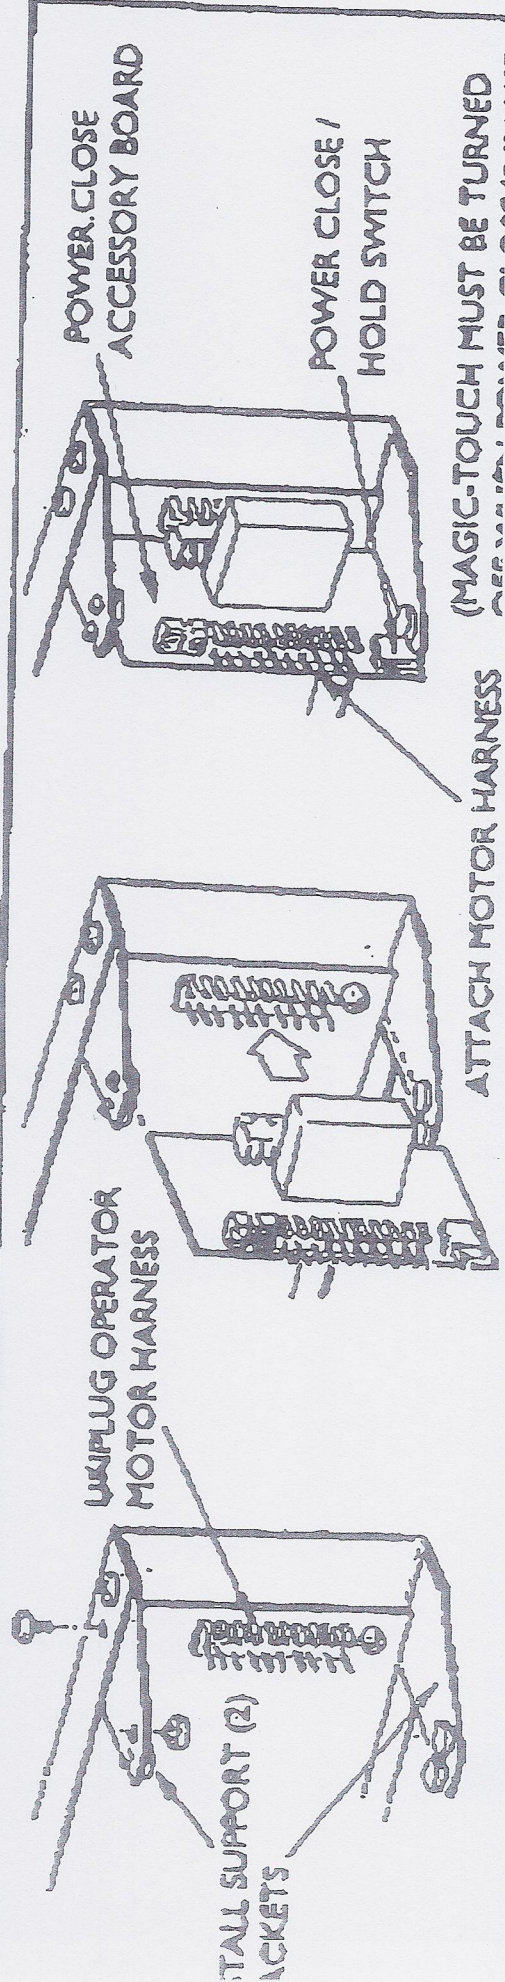




ATTACH MOTOR HARNESS

(MAGIC-TOUCH MUST BE OFF WHEN POWER CLC

1. Turn all power off.
2. Unplug the operator (motor) harness from the circuit board.
3. Install the two support brackets in holes provided and use screws supplied to secure.
4. Snap the four guides into the brackets.
5. Insert the accessory board into the connector on the circuit board.
6. Plug the operator (motor) harness into the accessory board.
7. Be sure Magic-Touch is in the OFF position on the main board.
8. Turn the power close switch, on the accessory board, to the ON position.
9. Turn power on and operate the door.
10. See below for tune-in of pot adjustments.

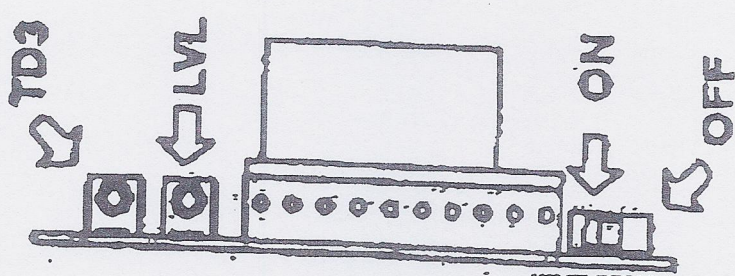

The TD3 pot is the Power Close Start Timer which sets the time (1.5 to 15 seconds) from when the door starts to close to when the additional closing force will be applied.

The LVL pot sets the level of that additional closing force.