


ANY TYPE OF ACTUATION DEVICE  
M.D., MAT, PUSH PLATE, ETC.  
ANY TYPE OR QUANTITY CAN BE  
CONNECTED IN PARALLEL.

DETAIL FOR FIELD INSTALLING THE AUTOMATIC "ON  
OFF HOLD OPEN" SWITCH ON ASTRO-SLIDE OPERATOR.


Switch may be EITHER

- TOGGL 81890-900
- ROCKER 81895-900
- KEY 72700-900

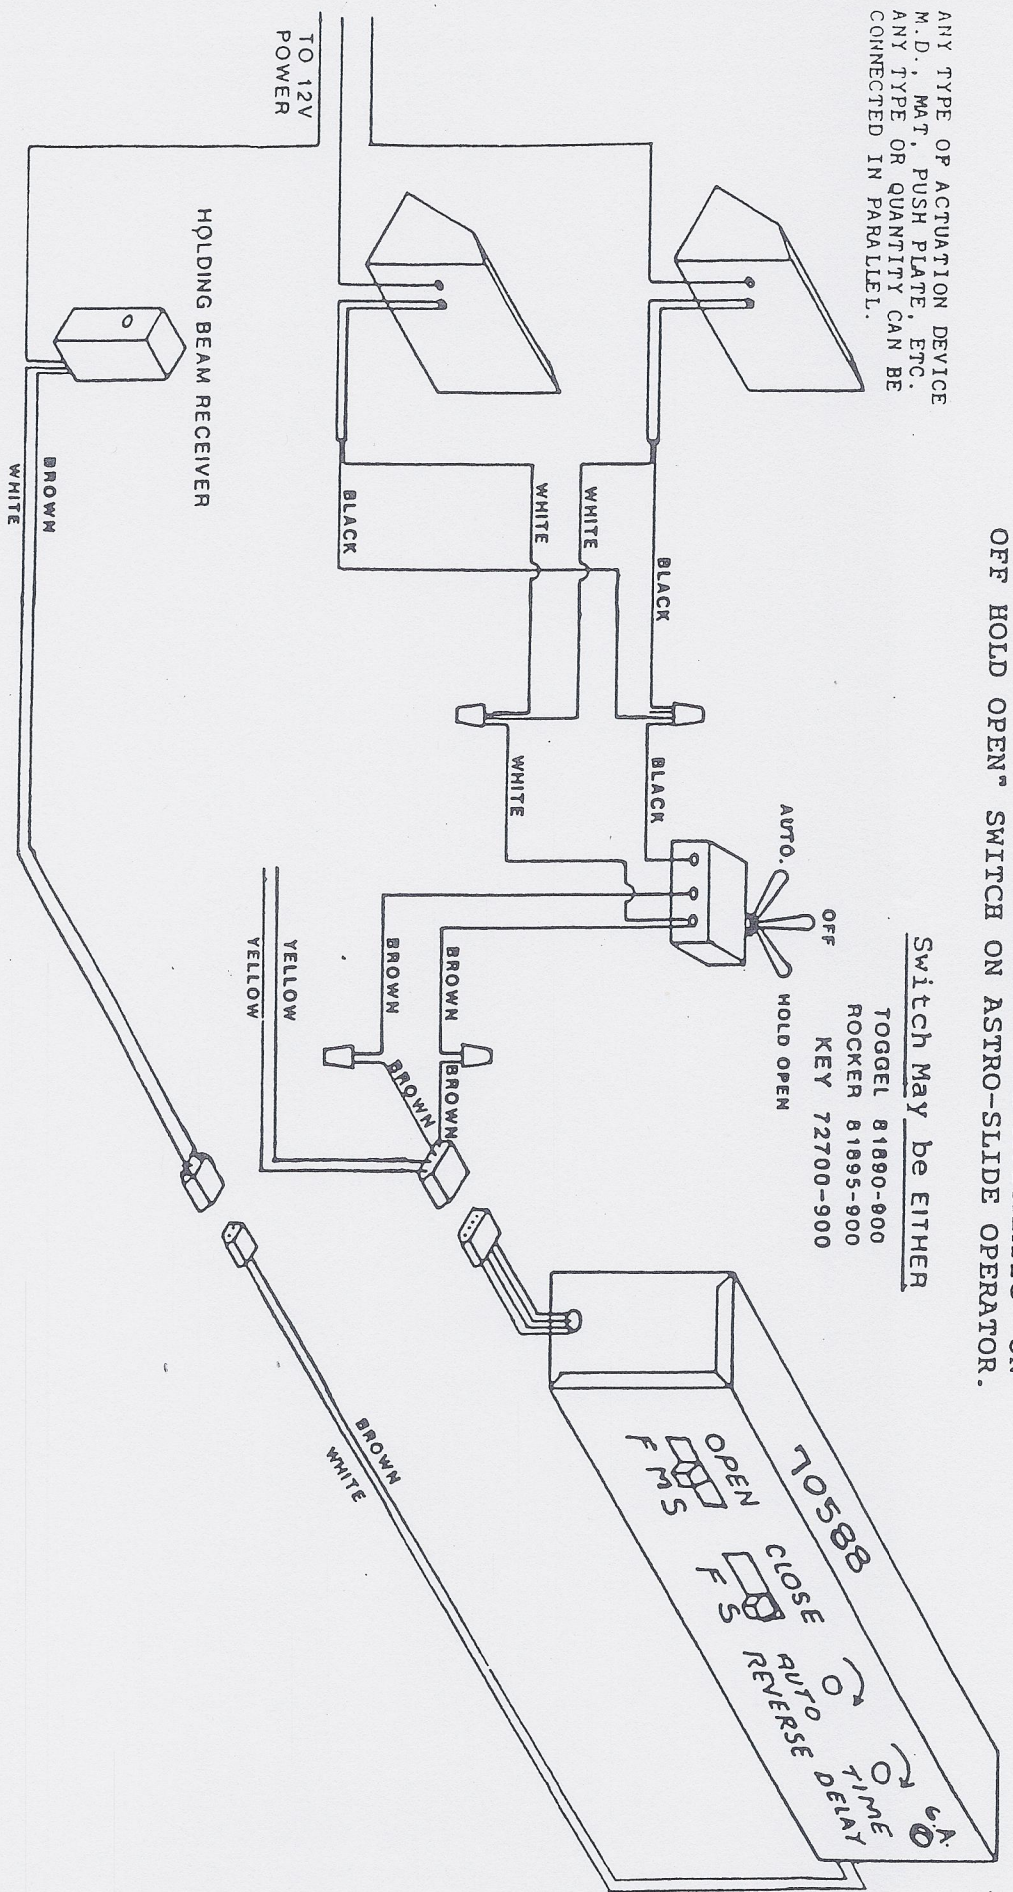

WIRING DIAGRAM FOR USE WITH THE #70588-9XX CONTROL BOX

INSTRUCTIONS FOR INSTALLING THE #70588-9XX CONTROL BOX WITH A NEW STYLE MOTOR GEAR BOX (HAS MAGNETIC COUNTER).

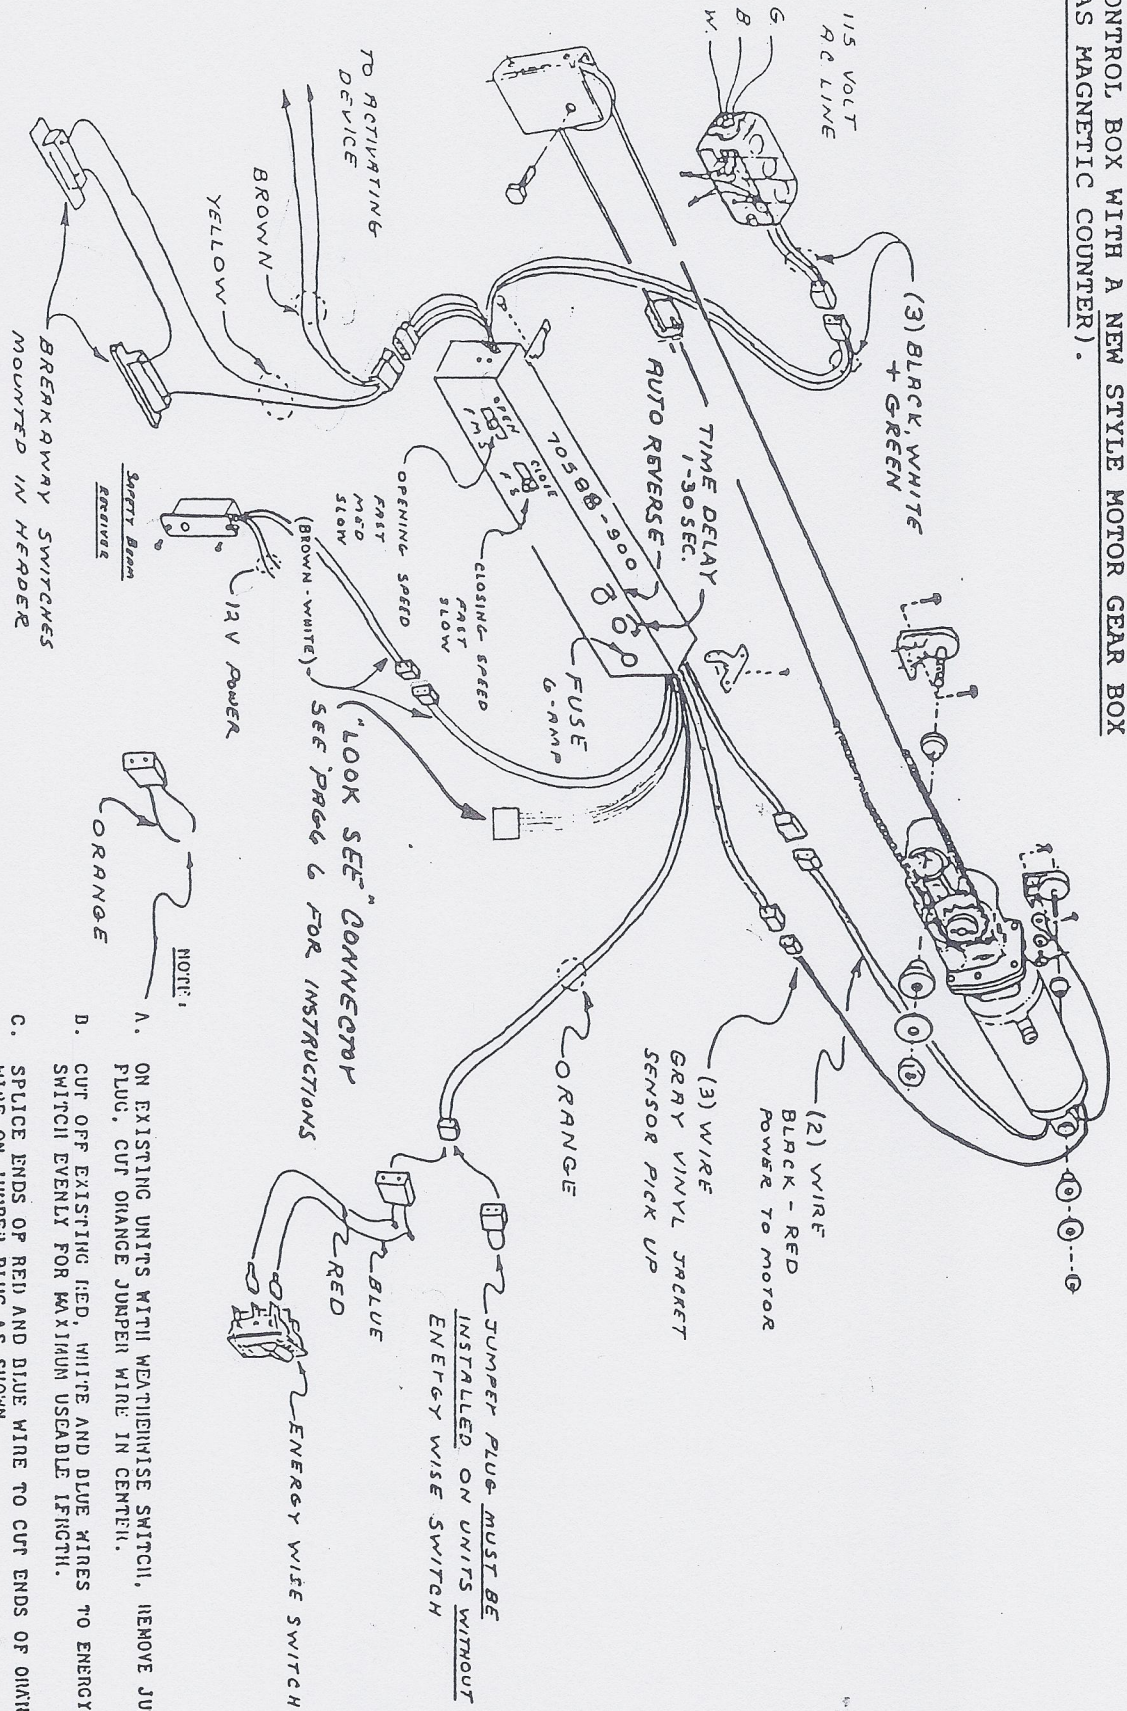

- NOTE:
- A. ON EXISTING UNITS WITH WEATHERWISE SWITCH, REMOVE JUMPER PLUG, CUT ORANGE JUMPER WIRE IN CENTER.
  - B. CUT OFF EXISTING RED, WHITE AND BLUE WIRES TO ENERGYWISE SWITCH EVENLY FOR MAXIMUM USEABLE LENGTH.
  - C. SPLICE ENDS OF RED AND BLUE WIRE TO CUT ENDS OF ORANGE WIRE ON JUMPER PLUG AS SHOWN.
  - D. WHITE WIRE NOT USED.

FIG. 3

WIRING DIAGRAM FOR INSTALLING THE #70588-9XX CONTROL BOX