


CYRO-TECH P.O.P.C. CONTROL

(USED ON OLD-STYLE POPC & WHISPER-SLIDE)

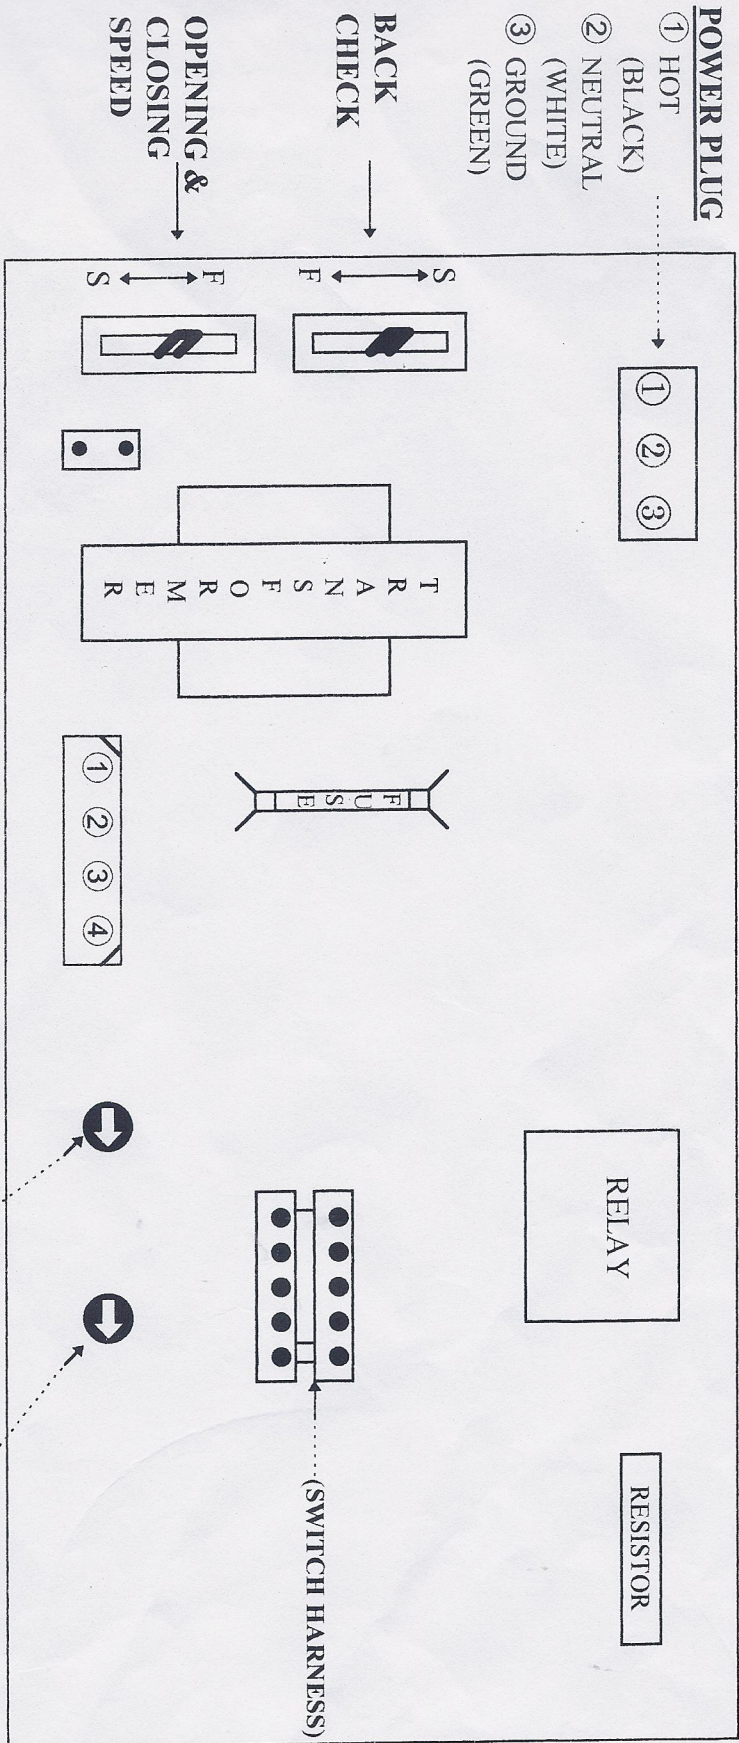

- POWER PLUG**
- ① HOT (BLACK)
 - ② NEUTRAL (WHITE)
 - ③ GROUND (GREEN)

BACK CHECK

OPENING & CLOSING SPEED

BREAKOUT SWITCHES
 NOTE: NOT FOUND ON ALL POPC CONTROLS


- ① 24-V OUT (USUALLY ORANGE)
- ② SAFETY (WHITE)
- ③ COMMON (RED)
- ④ ACTIVATE (BLACK)

POWER TIME

TIME DELAY

Switches are N/C when using this plug

White wire is part of B.O. circuit - close contact means Sock/Tripping to "Swing S/c cable" B.O. Sensor

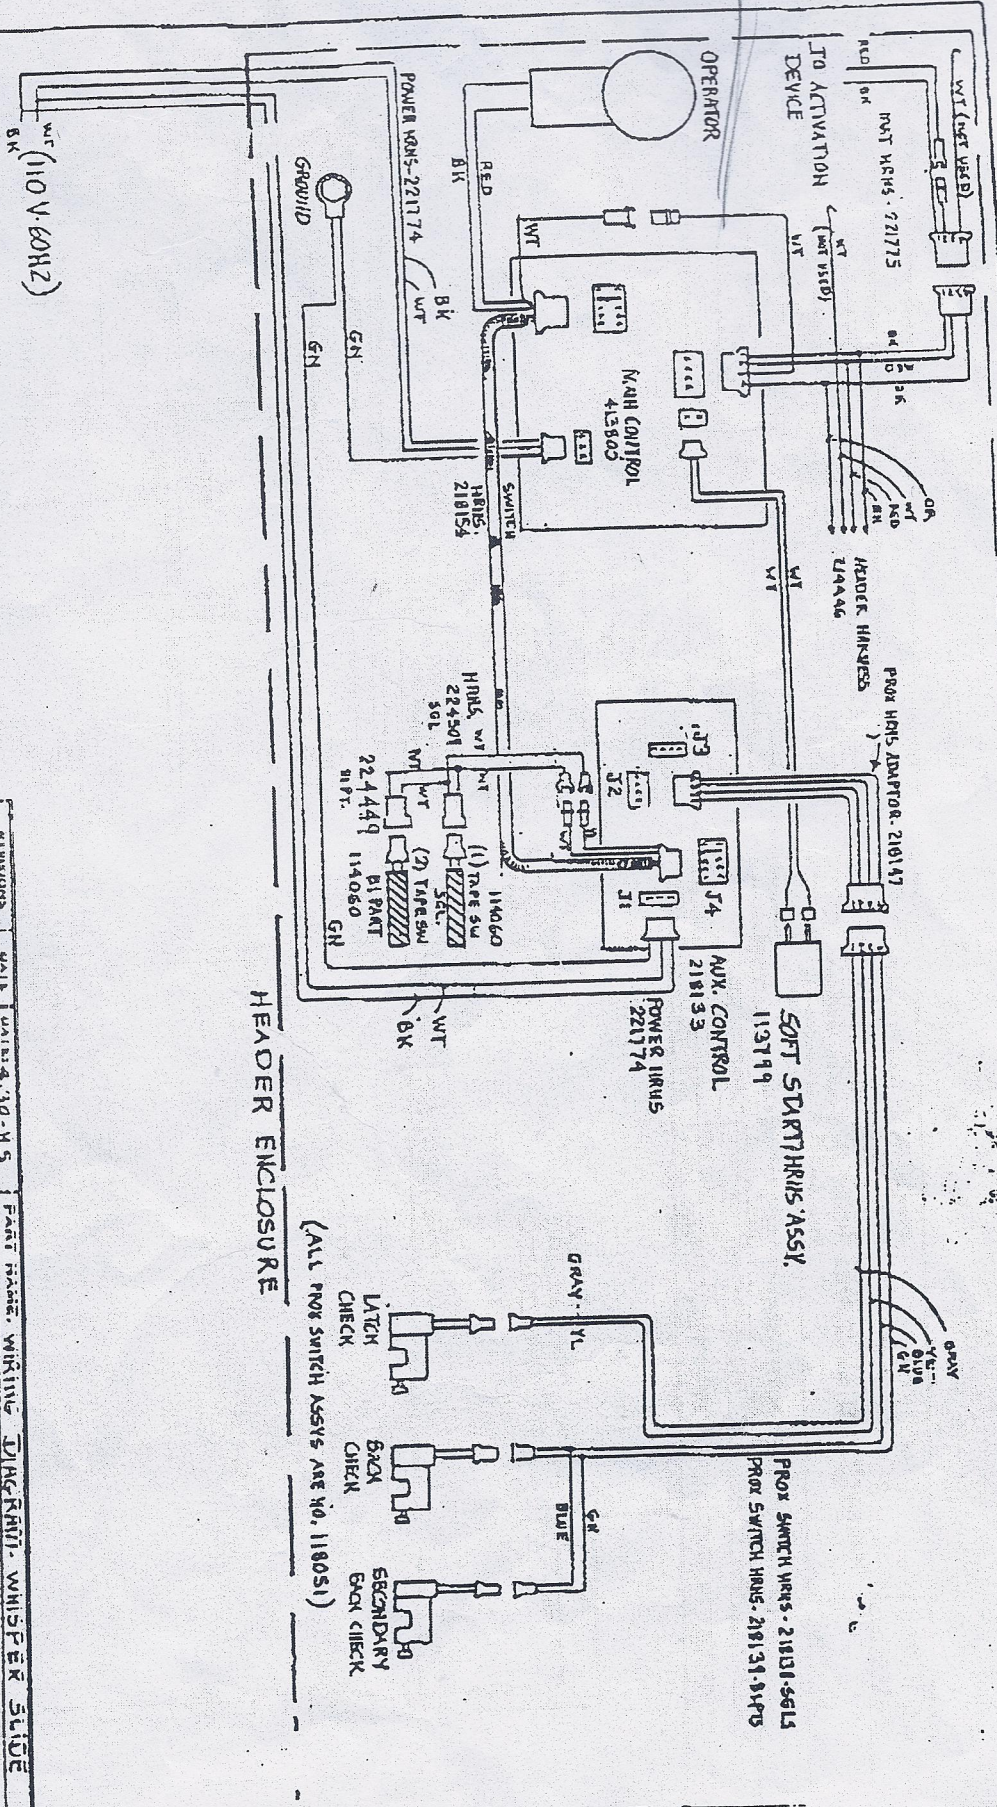

HEADER ENCLOSURE

(ALL PROX SWITCH ASSYS ARE NO. 118051)

ABBV.	COLOR	ABBV.	COLOR
BL	BLUE	RD	RED
BK	BLACK	YL	YELLOW
BR	BROWN	VO	VIOLET
GN	GREEN	OR	ORANGE
	GRAY	WT	WHITE

REVISIONS	DATE	SCALE	DATE	SCALE	DATE	SCALE	DATE	SCALE
ERN 362	5-2-85	30:45						
DRAWN BY: JES				APPROVED BY:				
VOLTAGES (SMALLEST NOTED)				PART NAME: WIRING DIAGRAM - WHISPER SLIDE				
MATERIAL:				SYSTEM 1100 WS - FXED SIDEITE				
SPECIFICATIONS:				LEFT HAND SINGLES AND BI PARTS				
DRAWING NO.				GYRO TECH Inc.				
PART NO.				DRAWING NO.				